

## Bell Transformer



HT8

### Application

Apply to circuit with rated voltage 230V~ and rated frequency 50/60Hz, used to power electric bell of extra low voltage.

### Technical Data

Rated input voltage: 230V AC

Rated output voltage:

HT8: 4, 6, 8, 12, 16, 24V

Rated frequency : 50/60Hz

rated power output: 8VA

Consumption: 1.15W

Service period: continuous operating

Pollution class : 2

Connection terminals: pillar terminal with clamp


Connection capacity: rigid conductor 10mm<sup>2</sup>

Installation:

On symmetrical DIN rail

Panel mounting

### Overall & Installation Dimensions

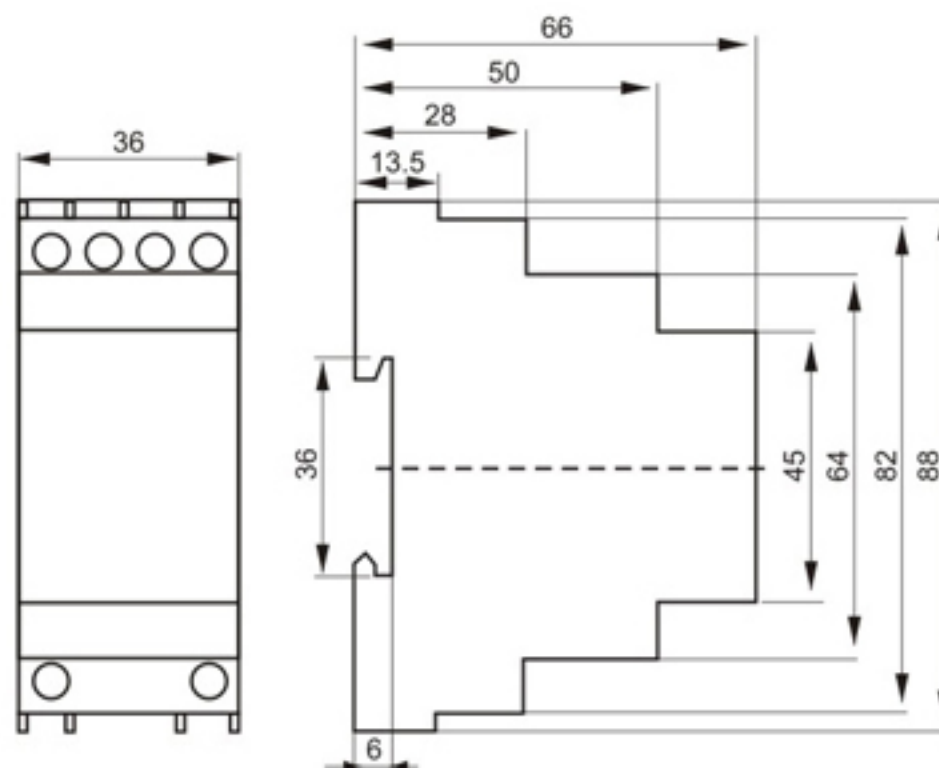

HT8