
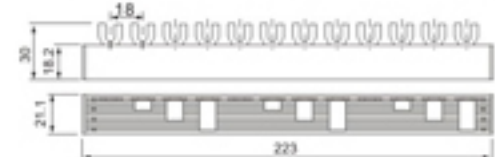
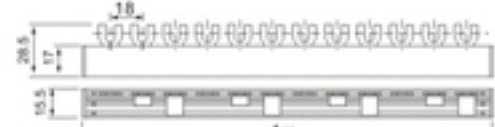
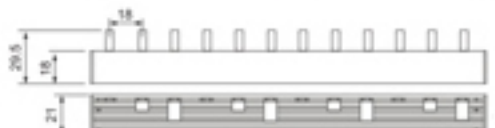
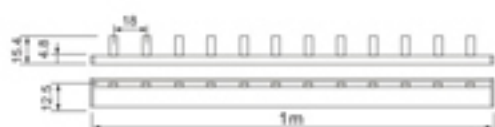
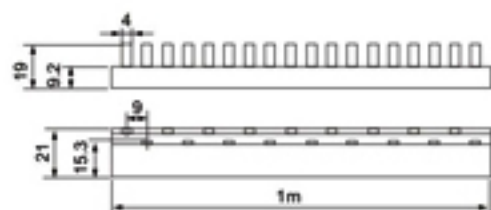


Copper Busbar



Busbar 1P+II(for DPH MCB & DPH RCBO)


Category	Rated current	Terminals	Length
HBP032/1N	32A	56	1m

Busbar pin type 1P,2P,3P,4P

Category	rated current	terminal	length
HBP063/1	63A	56(55)	1m
HBP063/2	63A	27	1m
HBP063/3	63A	18	1m
HBP063/4	63A	14	1m
HBP125/1	125A	56(55)	1m
HBP125/2	125A	27	1m
HBP125/3	125A	18	1m
HBP125/4	125A	14	1m

Busbar fork type 1P,2P,3P,4P

Category	rated current	terminal	length
HBFO63/1	63A	56(55)	1m
HBFO63/2	63A	27	1m
HBFO63/3	63A	18	1m
HBFO63/4	63A	14	1m

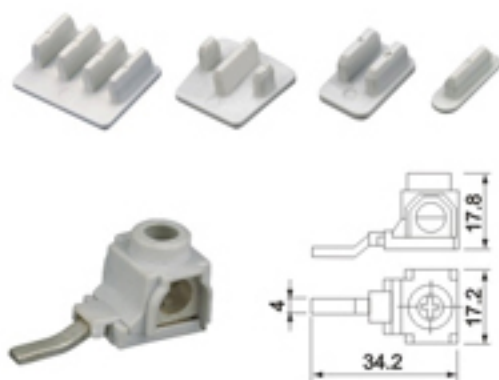

End Cap ■ HBC1 ■ HBC2 ■ HBC3 ■ HBC4 Terminal Adaptor ■ HBA1

Busbar 1P+II

- shape:pin type
- rated current:32A
- rated insulating voltage:500V AC
- flammability of plastic part:class 1

Busbar 1P,2P,3P,4P

- shape:pin type,fork type
- rated current:63,125A
- rated insulating voltage:500V AC
- Flammability of plastic part:class 1

End cap

- adaptable to full range busbars
- used to insulate the exposed living parts at both ends of busbar

Terminal adaptor

- Applicable to busbar for terminal connection
- Fixed on busbar insulation part to secure high reliability
- Connection capacity:25mm²