

## ZJR1 Series Soft Starter




### Main Characteristic

Adopt double single chip aptitude control,are the best choice for the updating and replacement products among the domestic soft starters. The listed function and performance are fine designed and strict tested.The parameter are set simply ,easily adjusted.It can keep the best start performance in any conditions .It' s not necessary to adjust newly when the load changes.High reliable quality and excellent electromagnetic compatibility can ensure soft starters work stable and reliably.

### Main Function

- Intelligence motor soft starter
- Intelligence motor protector
- Programmable relay output function:
  - (1)Programmable time output function
  - (2)Programmable state indication function
- Other Functon:
  - (1)digital ammeter ,voltmeter ,Power statistic
  - (2)Failure information storage(don' t miss once the power is off)
  - (3)Start time memory ,starter times statistic
  - (4)Run state memory ,can recover when the power cut off and then the power is on.
  - (5)0-20mA real time current output function(don' t interfere by CPU).
  - (6)Inside ,can set microcomputer RS485 Communication port.(User protocol).

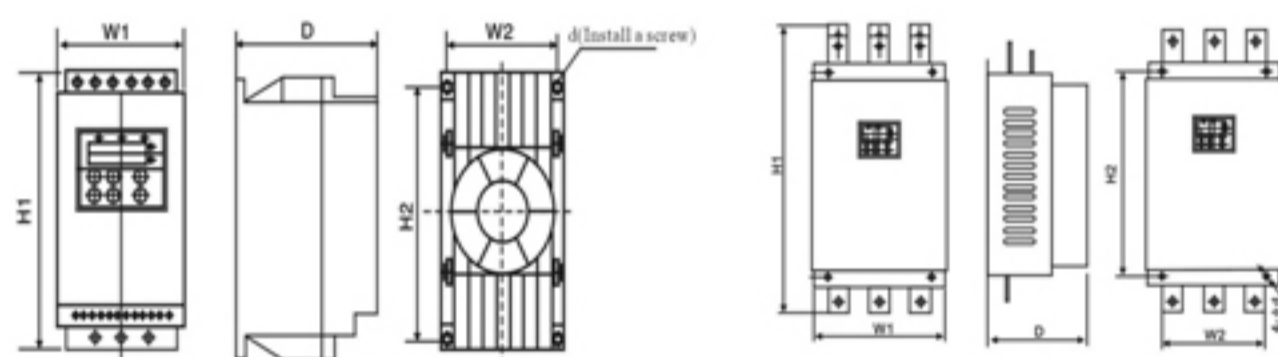

Specification	Rating Power(KV)	Rating Current(A)	Outline Dimension			Install Dimension			nww(kg)
			H1	W1	D	H2	W2	d	
ZJR1-3055	5.5	11	270	145	159	245	130	M6	<3.5
ZJR1-3075	7.5	15	270	145	159	245	130	M6	<3.5
ZJR1-3110	11	22	270	145	159	245	130	M6	<3.5
ZJR1-3150	15	30	270	145	159	245	130	M6	<3.5
ZJR1-3185	18.5	37	270	145	159	245	130	M6	<3.5
ZJR1-3220	22	44	270	145	159	245	130	M6	<3.5
ZJR1-3300	30	60	270	145	159	245	130	M6	<3.5
ZJR1-3370	37	75	270	145	159	245	130	M6	<3.5
ZJR1-3450	45	90	270	145	159	245	130	M6	<3.5
ZJR1-3550	55	110	270	145	159	245	130	M6	<3.5
ZJR1-3750	55	150	530	260	202	380	196	M8	<25
ZJR1-3900	75	180	530	260	202	380	196	M8	<25
ZJR1-31100	90	220	530	260	202	380	196	M8	<25
ZJR1-31300	110	264	530	260	202	380	196	M8	<25
ZJR1-31600	132	320	530	260	202	380	196	M8	<25
ZJR1-32000	160	400	530	260	202	380	196	M8	<25
ZJR1-32500	200	500	530	260	202	380	196	M8	<25
ZJR1-32800	250	500	580	290	245	460	260	M8	<35
ZJR1-32800	280	560	580	290	245	460	260	M8	<35
ZJR1-33150	315	630	580	290	245	460	260	M8	<35
ZJR1-34000	400	800	According to order					M8	<40
ZJR1-35000	500	1000						M8	<40