
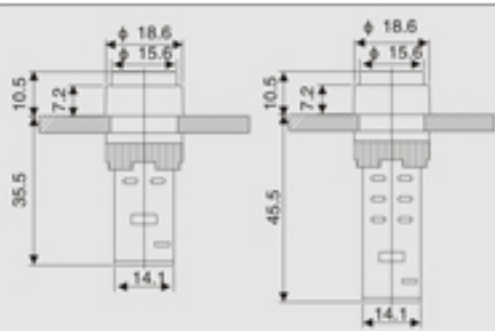

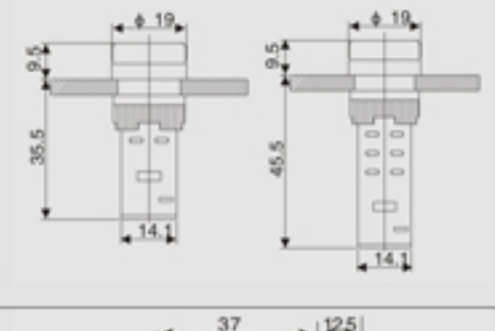



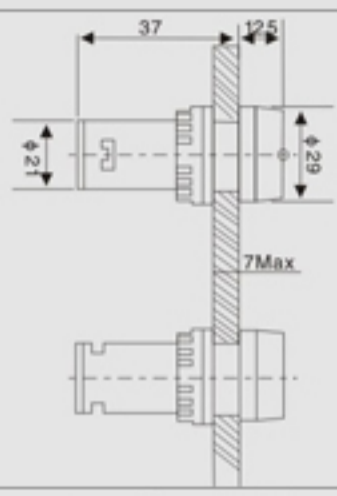



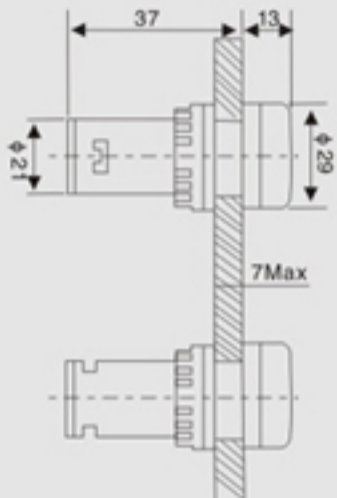



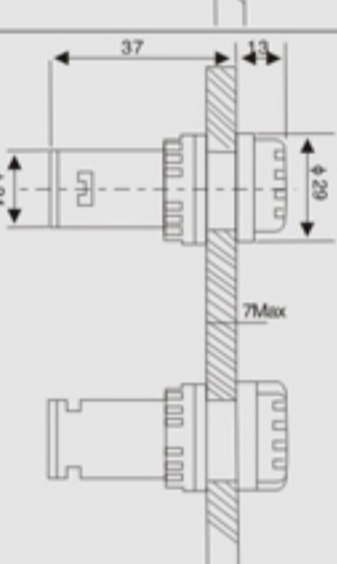



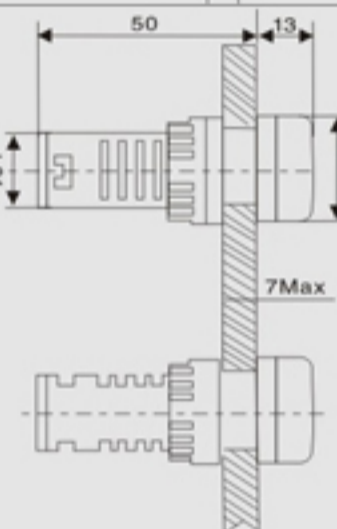



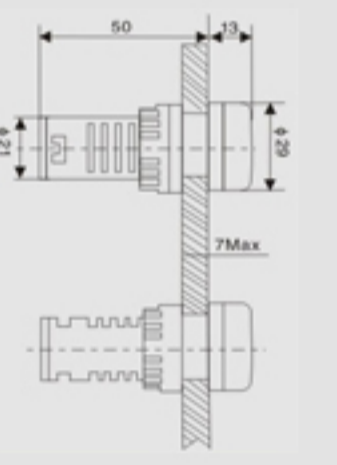




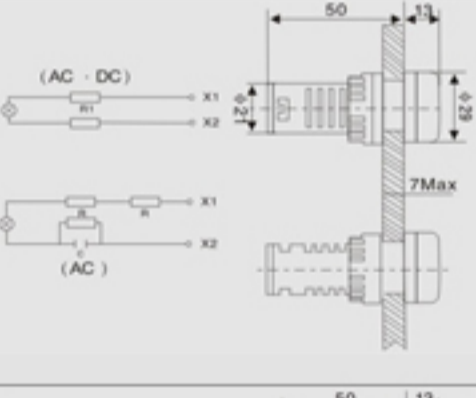

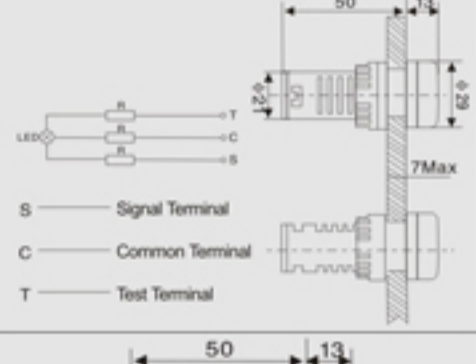



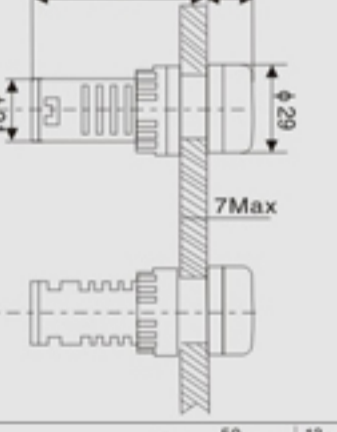

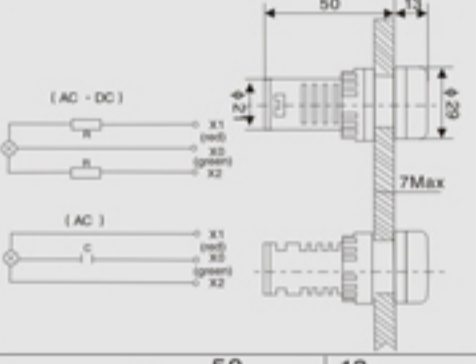



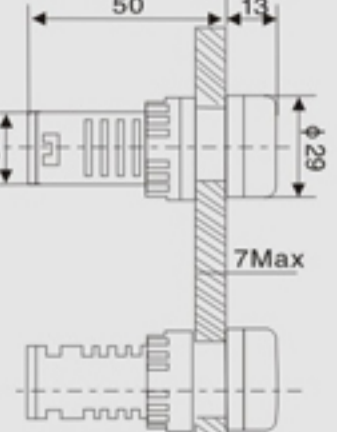


LED Indicator



Photo	Model	Color	Light voltage	Overall dimension
 Indicator Light B type	AD-16B AD-16BS	●-R ●-G ●-Y ●-B ●-2	20-DC.AC 6V-36V(Universal) 21-DC.AC 6V 22-DC.AC 12V 23-DC.AC 24V 24-DC.AC 36V 25-DC.AC 48V 26-DC.AC 110V 27-DC.AC 127V 28-DC 220V 31-AC 220V 32-AC 380	
 Indicator Light D type	AD-16D AD-16DS	●-R ●-G ●-Y ●-B ●-W		
 Indicator light B type	AD-22BS/  	●-R ●-G ●-Y ●-B ●-W		
 Indicator light D type	AD-22DS/  	●-R ●-G ●-Y ●-B ●-W		
 Indicator light E type	AD-22ES/  	●-R ●-G ●-Y ●-B ●-W		
 Buzzer	AD-22FM/  	●-K ●-R ●-G ●-Y ●-B ●-W	22-DC.AC 12V 23-DC.AC 24V 24-DC.AC 36V 25-DC.AC 48V 26-DC.AC 110V 27-DC.AC 127V 31-AC 220V 32-AC 380V	

Remarks

- 1.The connection of A,C,E type is solder-terminal,the connection of B,D,F type is screw terminal."S" is ultra-short type.According the voltage,To offer the counter products is no specification.
- 2.All products use pure high illuminant LED light source
- 3.Please clearly notice the specification,anti-interference(40V)and anti-surge.
- 4.The material for body of 16mm indicator lamp is fire-retardant reinforced nylon.
- 5.The material of Lamp cover is polycarbonate plastics.attractive shape,Bright in color,excellent in cushion effect.

Photo	Model	Color	Light voltage	Overall dimension
 Flash buzzer	AD-22SM/  	●-R ●-G ●-Y ●-B ●-W	22-DC.AC 12V 23-DC.AC 24V 24-DC.AC 36V 25-DC.AC 48V 26-DC.AC 110V 27-DC.AC 127V 31-AC 220V 32-AC 380V	
 Anti-interference indicator light	AD-22   	●-R ●-G ●-Y ●-B ●-W	23-DC.AC 24V 24-DC.AC 36V 25-DC.AC 48V 26-DC.AC 110V 27-DC.AC 127V 31-AC 220V 32-AC 380	
 Double color indicator light	AD-22D/T	●-R ●-G ●-Y ●-B ●-2	22-DC.AC 12V 23-DC.AC 24V 24-DC.AC 36V 25-DC.AC 48V 26-DC.AC 110V 27-DC.AC 127V 28-DC 220V 31-AC 220V 32-AC 380V	
 Flash light	AD-22S/  	●-R ●-G ●-Y ●-B ●-W		
 Double color indicator light	AD-22SS	R/G ●/●		
 bi-color flashing light	AD-22S/S  	R/G ●/●		

Remarks

- 1.The ultra-short type is suitable for installing in a narrow space.All ultra-short type lights are suitable for mounting holesΦ22、 Φ25 without additional accessories.DCpower supply can be replaced by AC.
- 2.the ultra-short type does not have DC220V voltage due to the radiation condition(if DC220v and a dischargable lamp are needed,longer light shell is available,just delete the S from the model).
- 3.Please state colour in  and voltage category code in .
- 4.Buzzer is intermittent sounding or flashing,with 10cm/80db,current 15-20mA.
- 5.All indicator lamps use pure high illuminant LED light source.